

Type 760 Diaphragm Valves



Manual Operation

SERIES: Type 760

SIZES: 3" & 4"

ENDS: True Union Socket, Threaded or ChemFlare™¹ Spigot² bodies with Plain, Socket, Threaded or Flanged ends

DIAPHRAGMS: EPDM³, FKM-B (Viton®) or PTFE



True Union Body

The Chemline **Type 760** Manual Diaphragm Valve is part of the 700 Series of diaphragm valves. 700 Series valves have modular design and interchangeable bodies, diaphragms and actuators. The Type 760 features compact size and all plastic construction for corrosion resistance and light weight. Being a diaphragm valve it is suitable for sanitary or slurry applications. Because it is slow closing, water hammer problems are eliminated. This is also a good throttling valve. With a PTFE diaphragm, it has corrosion resistance superior to ball or butterfly valves.

When a few manual valves are required on a system using the pneumatically actuated 700 Series, the Type 760 is a good choice because the bodies and diaphragms are the same.

Features

Solid Plastic Body and Actuator

- Light weight
- Corrosion resistant inside and out

Excellent for Sanitary Applications

- Self draining
- PVDF and unpigmented PP bodies are approved for food applications
- Sanitary clamp end connections are available

Butt Fusion Ends available

- Spigot bodies are available 1/2" to 3" for direct butt fusion into Chemline PP and PVDF piping systems. All mechanical connections may be eliminated.

Modular Construction

- Only 5 actuator and diaphragm sizes for 9 valve sizes. Spare parts requirements are minimized.

No Maintenance

- Elastomer diaphragms have life well over one million cycles, but if necessary they are easy to replace

¹ For ChemFlare™ end connectors, consult Chemline.

² PP and PVDF spigot ends have metric dimensions and will butt fuse directly to Chemline PP and PVD F piping systems. PVC spigots are ANSI

³ Epoxy cured EPDM

Type 760 Diaphragm Valves






PARTS

▲ Recommended Spare Parts





No.	Part	Pcs.	Materials
1▲	Valve Body	1	PVC, PP, PVDF CPVC
2▲	Process Diaphragm	1	EPDM, FKM-B (Viton®), PTFE
3	Handwheel with Sleeve	1	PPG/Brass
4	Bonnet	1	PPG
5	Compression Bearing	1	Delrin
6	Nut	1	Stainless Steel
7	Spindle	1	Stainless Steel
8	Spring Pin	1	Spring Steel
9	Compressor	1	PBTP
10	Washer	4 ¹	304 SS
11	Hex Bolt	4 ¹	304 SS
12	Bolt Cap	4 ¹	PE

¹ 18 pieces for 2-1/2" and 3", 12 pieces for 4" valves
² Complete operator only available as spare part

RELATIVE FLOW COEFFICIENT

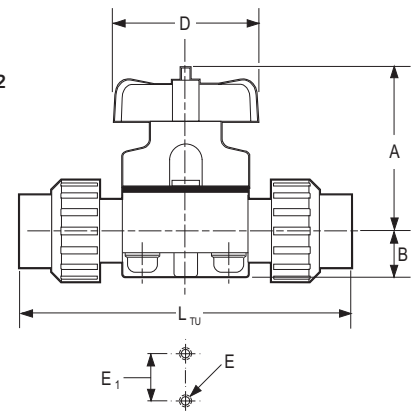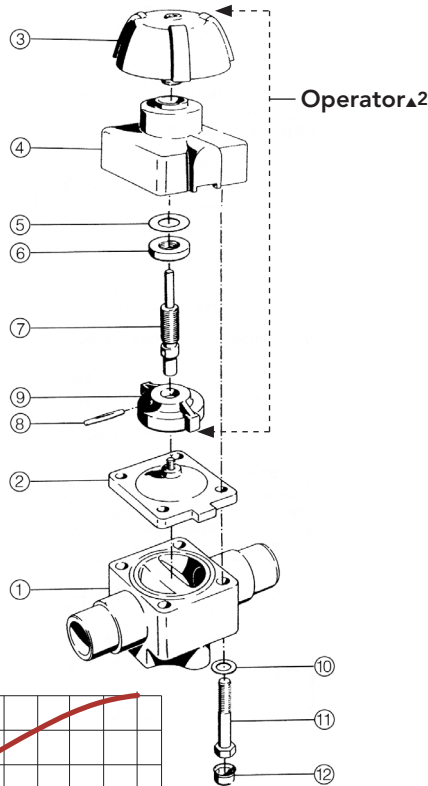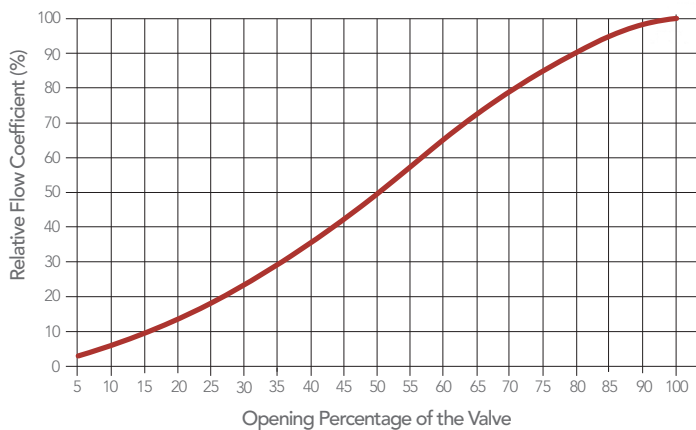

True Union Body



NON UNION ENDS

DIMENSIONS INCHES

Cv WEIGHTS VALUES

Size	A	B	D	E	E ₁	I _{SP}					PVC/CPVC	PP/PVDF	Flg''S'' ²	Pounds	C _v
							Union	Soc	Spig	Soc ¹	Thd ¹	Flg ¹			
							L _{TU}	L _{SP}	L _S	L _T	L _F	L _F	L _{FS}		
3"	10.2	2.2	8.5	M12	3.9	2.0	17.6 ³	11.8	16.0	15.7	12.6	14.9	10.4	16.5	140.
4"	11.9	2.5	9.8	M22	4.7	2.3	—	13.5	18.5	17.4	13.9	16.6	—	33.0	220.

¹ Socket, Threaded and Flanged fabricated are for PVC and CPVC valves only.
 Consult Chemline for PP or PVDF fabricated spigot body dimensions.

² Flanged "S" = ITT Saunders plastic lined valve length.

³ 3" Union socket body is fabricated using a spigot body.

Weights are for
PVC Spigot valves.

ORDERING EXAMPLE

Chemline Diaphragm Valves				760	030	A	E	U
Size	030 – 3"		040 – 4"					
Body Material	A – PVC	B – PP	C – CPVC	K – PVDF				
Diaphragm	E – EPDM	B – Nitrile	V – FKM-B (Viton®)					
	P – PTFE one-piece ¹		P2 – PTFE two-piece					
Ends	Blank – Spigot (Butt)		S – Socket	T – Threaded	F – Flanged	U – Union Socket	CF – ChemFlare™	

Example: Chemline Type 760 Diaphragm Valve, 3" PVC body, EPDM diaphragm, Socket Union ends.

¹ PTFE one-piece diaphragm is supplied standard.

Type 760.DS.08.06.25



CHEMLINE PLASTICS
SUPERIOR FLOW SOLUTIONS

55 Guardsman Road, Thornhill, ON, L3T 6L2, Canada | ISO 9001:2015 Certified
 1.800.930.2436 (CHEM) | fax.905.889.8553 | request@chemline.com | chemline.com